


## GF-04: SE-701 REMOTE RESET

When a ground-fault trip occurs, the trip remains latched until the RESET switch is pressed, the remote-reset terminals are shorted, or the supply voltage is cycled. The reset circuit responds only to a momentary closure so that a jammed or shorted switch will not maintain a reset signal. Cycling the supply voltage will not reset the trip LED.

Multiple SE-701 monitors can be reset simultaneously by a parallel connection of remote reset terminals 6 and 7. In this configuration, all SE-701's can be reset using a single contact, as shown:

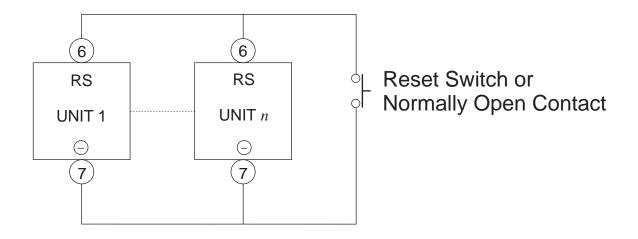

The equivalent circuit of the reset input is shown below.

