

08098500 & 08099400 BATTERY DISCONNECT SWITCHES

350A • SPST • IP65 • M12 Studs

08098500



Description


350A Manual battery master switch with removable or fixed handle.

08098500 is interchangeable with IVECO 4758238 **08098600** is interchangeable with IVECO 60156566 08099400 (change-over contact) is interchangeable with IVECO 4764283.

Features/Benefits

- 350A continuous current rating
- Designed for heavy duty application on earth moving vehicles
- Robust body in thermoplastic material
- Waterproof to IP65

Mounting Diagram



Specifications

Max Operating Voltage: 24V DC 250A & 350A **Max Continuous Current: Intermittent Current:** 2500A at 3 sec -40 °C to +85 °C **Operating Temp:**

Ingress Protection: IP65

Contacts: Silver-plated Copper

Terminals: M10 (brass nuts) change-over contact

M12 (inox nuts)

Applications

Heavy Truck

Off-Road

Emergency Vehicles


- Mining
- Agricultural
- Material Handling


Web Resources

Download 2D print and technical resources at: littelfuse.com/ManualBatterySwitches

Electrical Diagram

With supplementary Standard contacts (08099400) contacts





Ordering Information


PART NUMBER	VOLTAGE	AMPERAGE	CIRCUITRY	MOUNTING	INGRESS	TERMINAL NUTS	NOTES
08098500	12-24V DC	350A	SPST	Through-Hole	IP65	M12 Brass	Fixed handle
08098600	12-24V DC	350A	SPST	Through-Hole	IP65	M12 Brass	Removable key
08099400	12-24V DC	350A	SPST	Through-Hole	IP65	M10 Brass M12 Brass	Fixed handle (change-over contact)

1 of 2



08098500 & 08099400 BATTERY DISCONNECT SWITCHES

Dimensions in millimeters

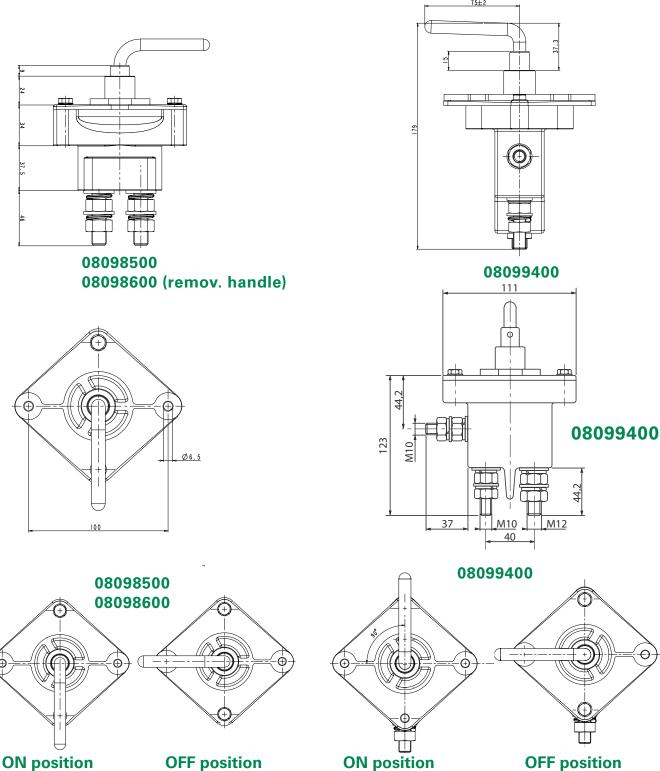

Visit **Littelfuse.com** for the most up-to-date product information. Littelfuse reserves the right to make product changes, without notice. Material in this document is as accurate as known at the time of publication.